

# IDEAL 2265

max.  
**13**  
sheets

Convenient deskside shredder with cabinet  
and EASY-Touch for intuitive operation

← 22 cm →

**Level P-2** 4 mm strip cut

Sheet capacity\*: 11-13 | 9-11

**Level P-4** 3 x 25 mm particle cut

Sheet capacity\*: 6-7 | 5-6

**Level P-5** 2 x 15 mm particle cut

Sheet capacity\*: 4-5 | 3-4




\* A4 paper 70 g/m<sup>2</sup> | 80 g/m<sup>2</sup>

## Technical specifications

<b>Volume</b>	20 litres (shred bin)
<b>Power</b>	230 V / 50 Hz**
<b>Motor capacity</b>	150 Watt single phase motor

\*\* other voltages available



<b>Dimensions</b>	516 x 345 x 213 mm (H x W x D)
<b>Weight</b>	10.5 kg / 11.5 kg (particle cut)
<b>ID-No.</b>	11224501

**GS certificate-No. DP 10031**

## Product characteristics

Easy-to use deskside shredder for environmentally conscious users. EASY-Touch multifunction switch element for stand-by / stop (off) / reverse with integrated optical signals for the operational status of the shredder. Photo cell controlled automatic start and stop. Automatic reverse and power cut-off. ZERO ENERGY standby mode: complete, automatic disconnection from power supply after 30 minutes. Transparent safety flap in the feed opening as additional safety element. Quiet, powerful and energy-efficient single phase motor. Double motor protection. High-quality, paper clip proof cutting shafts from special hardened steel with lifetime guarantee. High-quality wooden cabinet. Removable shred bin from impact-resistant plastic with large window showing fill level. 20 litres volume for the shredded material. Magnetic switch for automatic stop if the shred bin is removed from the cabinet (2265 CC).

# IDEAL

WWW.IDEAL.DE

# IDEAL 2265

## Features




### SOLID STEEL CUTTING SHAFTS

Robust and durable: high-quality paper clip proof cutting shafts with lifetime guarantee under conditions of fair wear and tear.



### SAFETY FLAP

The safety flap in the feed opening is an additional safety element to keep fingers, ties or other objects away from the cutting shafts.

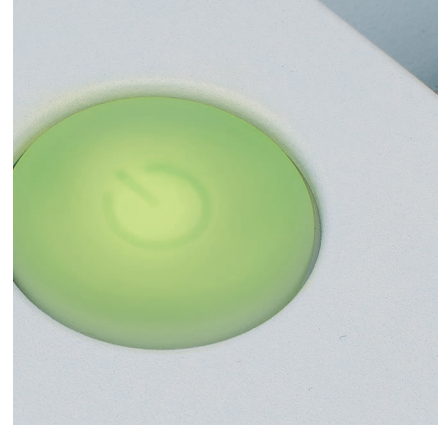

### EASY-TOUCH MULTIFUNCTION SWITCH

Easy operation is guaranteed with the EASY-Touch multifunction switch for stand-by / stop (off) / reverse and optical signals for the operational status of the shredder.



### REMOVABLE SHRED BIN

With large window showing fill level and magnetic switch for automatic stop if the full shred bin is removed (cross cut).



# IDEAL

certificate  
no. **DP 10031**  
dated 31.01.2014

## GS Test Certificate

Name and address of the holder of the certificate: (customer): Krug & Priester GmbH & Co. KG  
Simon-Schweitzer-Straße 34  
72336 Balingen

Name and address of the Manufacturer: see above

Product designation: Paper Shredder

Type: 11221002, 11223002, 11227001, 11224501

Testing based on: DIN EN 60950-1:2011-01+A12:2011-08  
EN 60950-1:2006-04+A11:2009-03+A1:2010-03+A12:2011-02  
IEC 60950-1:2005-12+AMD1:2009-12 Information technology equipment – Safety; Part 1: General requirements  
EN 12100-2:2004 Safety of machinery – Basic concepts, general principles for design; Part 2: Technical principles EN ISO 13857:2008 Safety of machinery – Safety distances to prevent hazard zones being reached by upper and lower limbs

Remarks: This Test Certificate replaces the Test Certificate DP 10031 dated 25.09.2012.

The type tested meets the requirements specified in article 21 para. 1 of the German Product Safety Act. The holder of the certificate is entitled to affix the GS mark shown overleaf to the products complying with the type tested. At that, the holder of the certificate shall observe the conditions specified overleaf.

The present certificate including the right to affix the GS mark is valid until: **21.03.2015**

Further provisions concerning the validity, the extension of the validity and other conditions are laid down in the Rules of Procedure for Testing and Certification of August 2012.



Signature (Dipl.-Ing. Vogl)

Postal address: Postfach • D-65173 Wiesbaden • Office: Rheinstr. 6-8 • D-65185 Wiesbaden  
Phone: +49 (0) 611/131-8219 • E-Mail: pruefstelle-dp@bgetem.de  
612.17-So/Ho • Test report: A 09194 • Produktschlüsselnummer: 001.1001